
## **CZT Single Crystal Substrate and Window**

MTI supplies high quality Cd<sub>1-x</sub>Zn<sub>x</sub>Te ( CZT) crystal at affordable cost. CZT crystal is grown by special Bridgman technique up to 2" Diameter. Compared with CdTe, it has larger band gap and excellent IR transmission. It is widely used as X-ray and y-ray detectors, and substrate for MTI provides two grades CZT crystal components, e.g substrate grade and epitaxial film. detector grade

## Typical Properties of CZT Crystal

	Substrate Grade	Detector grade
Chemical Formula	Cd <sub>1-x</sub> Zn <sub>x</sub> Te	
Concentration	x=0.04±0.01	x=0.10±0.03
Crystal structure	Cubic, Zinc blend	
Lattices constants	a=6.468	a=6.446 Å
Band gap	E <sub>g</sub> =1.63 (at 300K)	E <sub>g</sub> =1.658 (at 300K)
FWHM X-ray rocking curve	< 50 rad·s	
Infrared transmittance	> 60% (1.5~25 μm)	
Resistance	> 10 <sup>3</sup> Ω⋅cm	> 10 <sup>9</sup> Ω⋅cm
DEPD	< 1×10 <sup>5</sup> /cm <sup>2</sup>	
Standard size	10x10x1.0 mm	up to 20x20x20 mm

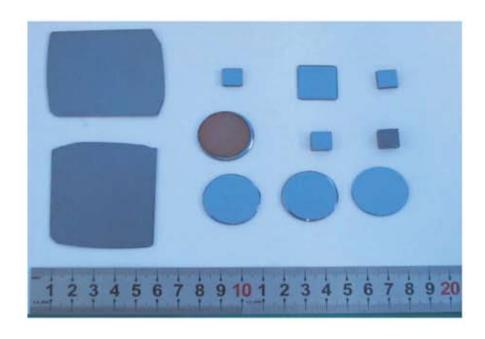

MTI Corporation

860 South 19th Street, Richmond, CA 94804 Website: www.mtixtl.com Email: info@mtixtl.com

Tel: 510-525-3070

Fax: 510-525-4705